



Max. leaf weight

500 Kg

Max speed

12 m/min.

Use frequency

30%



- Easy programming thanks to the display and to the prewired control unit
- Magnetic limit switch.
- Integrated encoder with reverse function upon obstacle detection and specific management in opening and slow down



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	740 E Z16 with encoder
Power supply voltage	220-240V ~ 50/60 Hz
Motor	Single phase
Max. power	350 W
Max. torque	18 Nm (*)
Max expressed force	450 N (*)
Reduction ratio	1:25
Max. leaf width	15 m
Leaf speed	12 m/min
Speed adjustment and motor control	No
Opening and closing limit switch	Magnetic
Pinion	Z16 module 4
Encoder	Optical encoder
Force adjustment	Via electronic control board
Operating ambient temperature	-20°C ÷ +55°C
Thermal protection	140°C
Protection class	IP44
Weight	10 kg
Dimensions (LxDxH)	295 x 221 x 322 mm
Max. leaf weight	500 Kg
Use frequency	S3 - 30%
Electronic equipment	740D incorporated

(*) data referred to 230V~ 50Hz.

FAMILY MODELS

Model	Item code
740 E Z16 with encoder	1097805

PACKS

740 includes: an electromechanical gearmotor with 740D control unit, encoder for anti-crushing safety device, pinion for rack, two release keys, foundation plate, limit switch magnets.

Typical Installation Examples page. 340

ELECTRONIC CONTROL UNITS



740D (incorporated in automation)
Info at page 150

202269

RACKS



Galvanised rack 30x12 mod. 4 including weld-on fittings (4 pcs pack, 1 m each)

490122



Galvanised rack 30x8 mod. 4 including weld-on fittings (4 pcs pack, 1 m each)

490123



Galvanised rack 30x12 mod. 4 including mechanical fittings (4 pcs pack, 1 m each)

490124

>>



Galvanised rack 30x12 mod. 4 including mechanical fittings (4 pcs pack, 1 m each)

490125



Discontinuing

Reinforced nylon rack with steel core 30x20 and fixing accessories (4 pcs pack, 1 m each)

4901204



30x20 mod.4 nylon rack (4-pack of 1m pieces)


490333



Kit of 16 fastening screws (to use with cod.490333)

390178

INSTALLATION DIMENSIONS (MM)

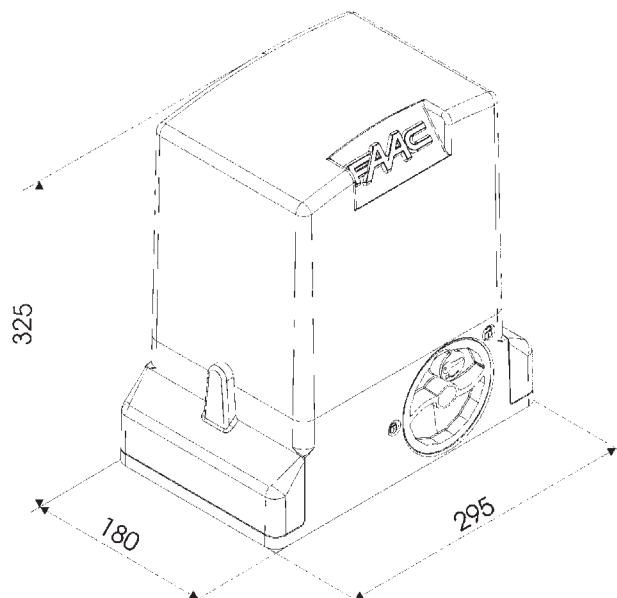

NOTE

♦ Max gate weight: 400kg.

OTHER ACCESSORIES

Key operated buttons
page 176

Safety devices
page 190

Transmitters and receivers
page 168

Photocells and columns
page 186

Flashing lights
page 198

Various accessories
page 200