

The logo consists of a solid blue square with the word "Nice" written in white, bold, sans-serif font inside it.

Nice

# Robo600

**New motor for sliding gates weighing up to 600 kg:  
a practical solution successfully combining  
technology and design.**



Nice

# Robo

**Innovative design,  
high efficiency and  
under control at all times.**

New motor for sliding gates weighing up to 600 kg.

Robust, functional mechanics: the choice of materials, design of the internal components and use of high-quality lubrication systems guarantee robustness and maximum efficiency.


Easy to install: thanks to compatibility with previous Nice models and the practical adjustment systems.

## Ultra-simple programming

Thanks to the MyNice Pro app, connecting the control unit to the Pro-View or via BiDi-WiFi makes all phases in programming the control unit easy and automatic.

## Nice, ever more connected!

With the BiDi Z-Wave plug-in module, Nice Gate&Door automations can be integrated into smart home systems using Z-Wave™ connectivity.

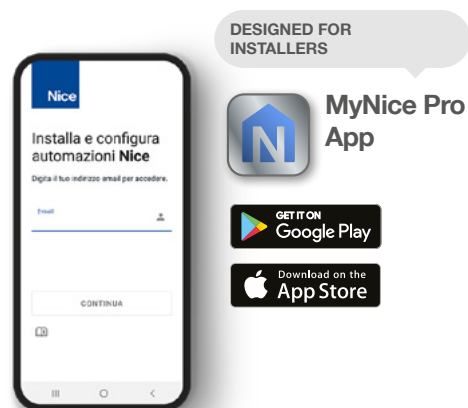



**Sustainability**  
Made of 75%  
**reclaimed ABS.**

**BUS T4 Port**  
for connection of BIDI-WIFI,  
BIDI-ZWAVE and IBT4N  
plug-in communication  
interfaces and via the IBT4N  
IT4WIFI adapter.

**Secure anchorage** with  
four fixing points and  
**greater motor positioning  
flexibility** than with the rack.

**Minimal design** with  
exceptionally clean lines, shapes  
and colours.

**Easy-to-use** release lever locks  
the cover to the base, ensuring  
the automation is protected.

**Ever perfect installation**  
The new fixing plate lets  
you replace an existing Nice  
installation quickly.



Nice

# Robo600

For sliding gates weighing up to 600 kg.



Also available in a KIT



Opera

BUS T4

230V

**Non-reversible, 230 VAC, electromechanical limit switch, control unit with built-in radio receiver.**

**Efficient and safe:** functional mechanical design and high-performance materials.


**Safe and easy-to-operate release lever.**

**Easy to programme** thanks to the MyNice Pro app, connecting the control unit to the Pro-View or via BiDi-WiFi makes all phases in programming the control unit easy and automatic.

**Easy to install:** thanks to compatibility with previous Nice models and the horizontal and vertical adjustment systems.

**Always connected** even remotely, thanks to the BIDI-WIFI or BIDI-ZWAVE module.

## Nice Professional Tools



### ProView

Multifunction interface, connects to Nice control units by BUS T4 port and enables Nice automation systems to be installed and configured by smartphone via the MyNice Pro App.



MyNice Pro App



Code	Description
<b>RO600</b>	Non-reversible electromechanical gearmotor, 230 Vac, with control unit and built-in receiver, for sliding gates weighing up to 600 kg
<b>RO600KCE</b>	Kit for automating sliding gates up to 600 kg, 230 Vac, built-in control unit, built-in radio receiver. Included in the kit: RO600, 2 pcs. ON2E, 1 pcs. EPM, 1 pcs. ELAC
<b>RO600KLT</b>	EasyKit for automating sliding gates weighing up to 600 kg, 230 Vac, built-in control unit, built-in radio receiver. Included in the kit: RO600, 2 pcs. ON2E

**N.B.** The contents of the pack may vary: always consult the dealer.



**The RO600KCE kit contains:**

Code	Description	Quantity
<b>RO600</b>	Non-reversible electromechanical gearmotor, 230 Vac, with control unit and built-in receiver, for sliding gates weighing up to 600 kg	1
<b>ON2E</b>	Transmitter, 433.92 MHz, 2-channels	2
<b>EPM</b>	Pair of outdoor photocells	1
<b>ELAC</b>	Flashing LED light with built-in antenna	1



**The RO600KLT kit contains:**


Code	Description	Quantity
<b>RO600</b>	Non-reversible electromechanical gearmotor, 230 Vac, with control unit and built-in receiver, for sliding gates weighing up to 600 kg	1
<b>ON2E</b>	Transmitter, 433.92 MHz, 2-channels	2

**COMMON ACCESSORIES**

Code	Description	Pcs. Pack
<b>ROA41</b>	Spare control unit for RO600	1
<b>ROA6</b>	Slotted rack, M4 25x20x1000 mm, nylon with metal insert. For gates weighing up to 500 kg	1
<b>ROA7</b>	Galvanised rack, M4 22x22x1000 mm	1
<b>ROA8</b>	Galvanised rack, M4 30x8x1000 mm, with screws and spacers	1
<b>TS</b>	Signboard	1

Code	RO600
<b>ELECTRICAL SPECIFICATIONS</b>	
Power supply (VAC 50/60 Hz)	230
Power (W)	300
<b>PERFORMANCE DATA</b>	
Speed (m/s)	0.18
Force (N)	600
Work cycle (cycles/hour)	20
<b>DIMENSIONAL AND GENERAL DATA</b>	
Protection class (IP)	44
Operating temperature (°C Min/Max)	-20 to +55
Dimensions (mm)	340x220x303 h
Weight (kg)	11

**DIMENSIONS**

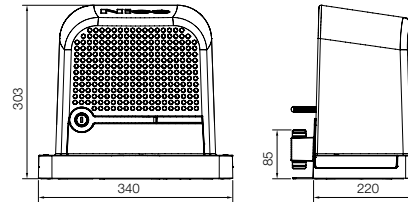

**COMPATIBILITY TABLE WITH CONTROL SYSTEMS AND ACCESSORIES**

ROBO
<b>Control unit/Receiver</b>
• <b>Built-in*</b>
<b>OXIBD / OXILR</b>
<b>Transmitter</b>
• <b>ERA INTI</b> - 1 o 2 channels, 433,92 MHz, coloured
• <b>ERA ONE</b> - 1, 2, 4 or 9 channels, 433,92 MHz
<b>ERA ONE BD / ERA ONE LR</b>
<b>ERA FLOR / NICEWAY</b>
<b>Photocells</b>
• <b>EPS</b> - Slim / <b>EPM</b> - Medium / <b>EPL</b> - Large
<b>EPSB</b> - Slim, BlueBus / <b>EPMB</b> - Medium, BlueBus / <b>EPLB</b> - Large, BlueBus
• <b>EPMOR</b> - Medium, reflective
<b>EPMORB</b> - Medium, BlueBus, reflective
<b>EPMOW</b> - Medium, wireless, self-synchronised
• <b>F210</b> - Synchronised, adjustable / <b>FT210</b> - For sensitive edges
<b>F210B</b> - BlueBus / <b>FT210B</b> - For sensitive edges, BlueBus
<b>Flashing light</b>
• <b>ELAC</b>
<b>ELDC</b>
<b>WLT</b> - Multi-function LED indicator


\* Radio receiver not compatible with the O-box functions of the Opera system

Nice

**A single ecosystem to connect, simplify and control all home automations.**

The new range of sliding gates are designed to connect and integrate with the **Yubii® ecosystem**.

Thanks to the plug-in communication interfaces, the new range of motors integrates with your smart home system.

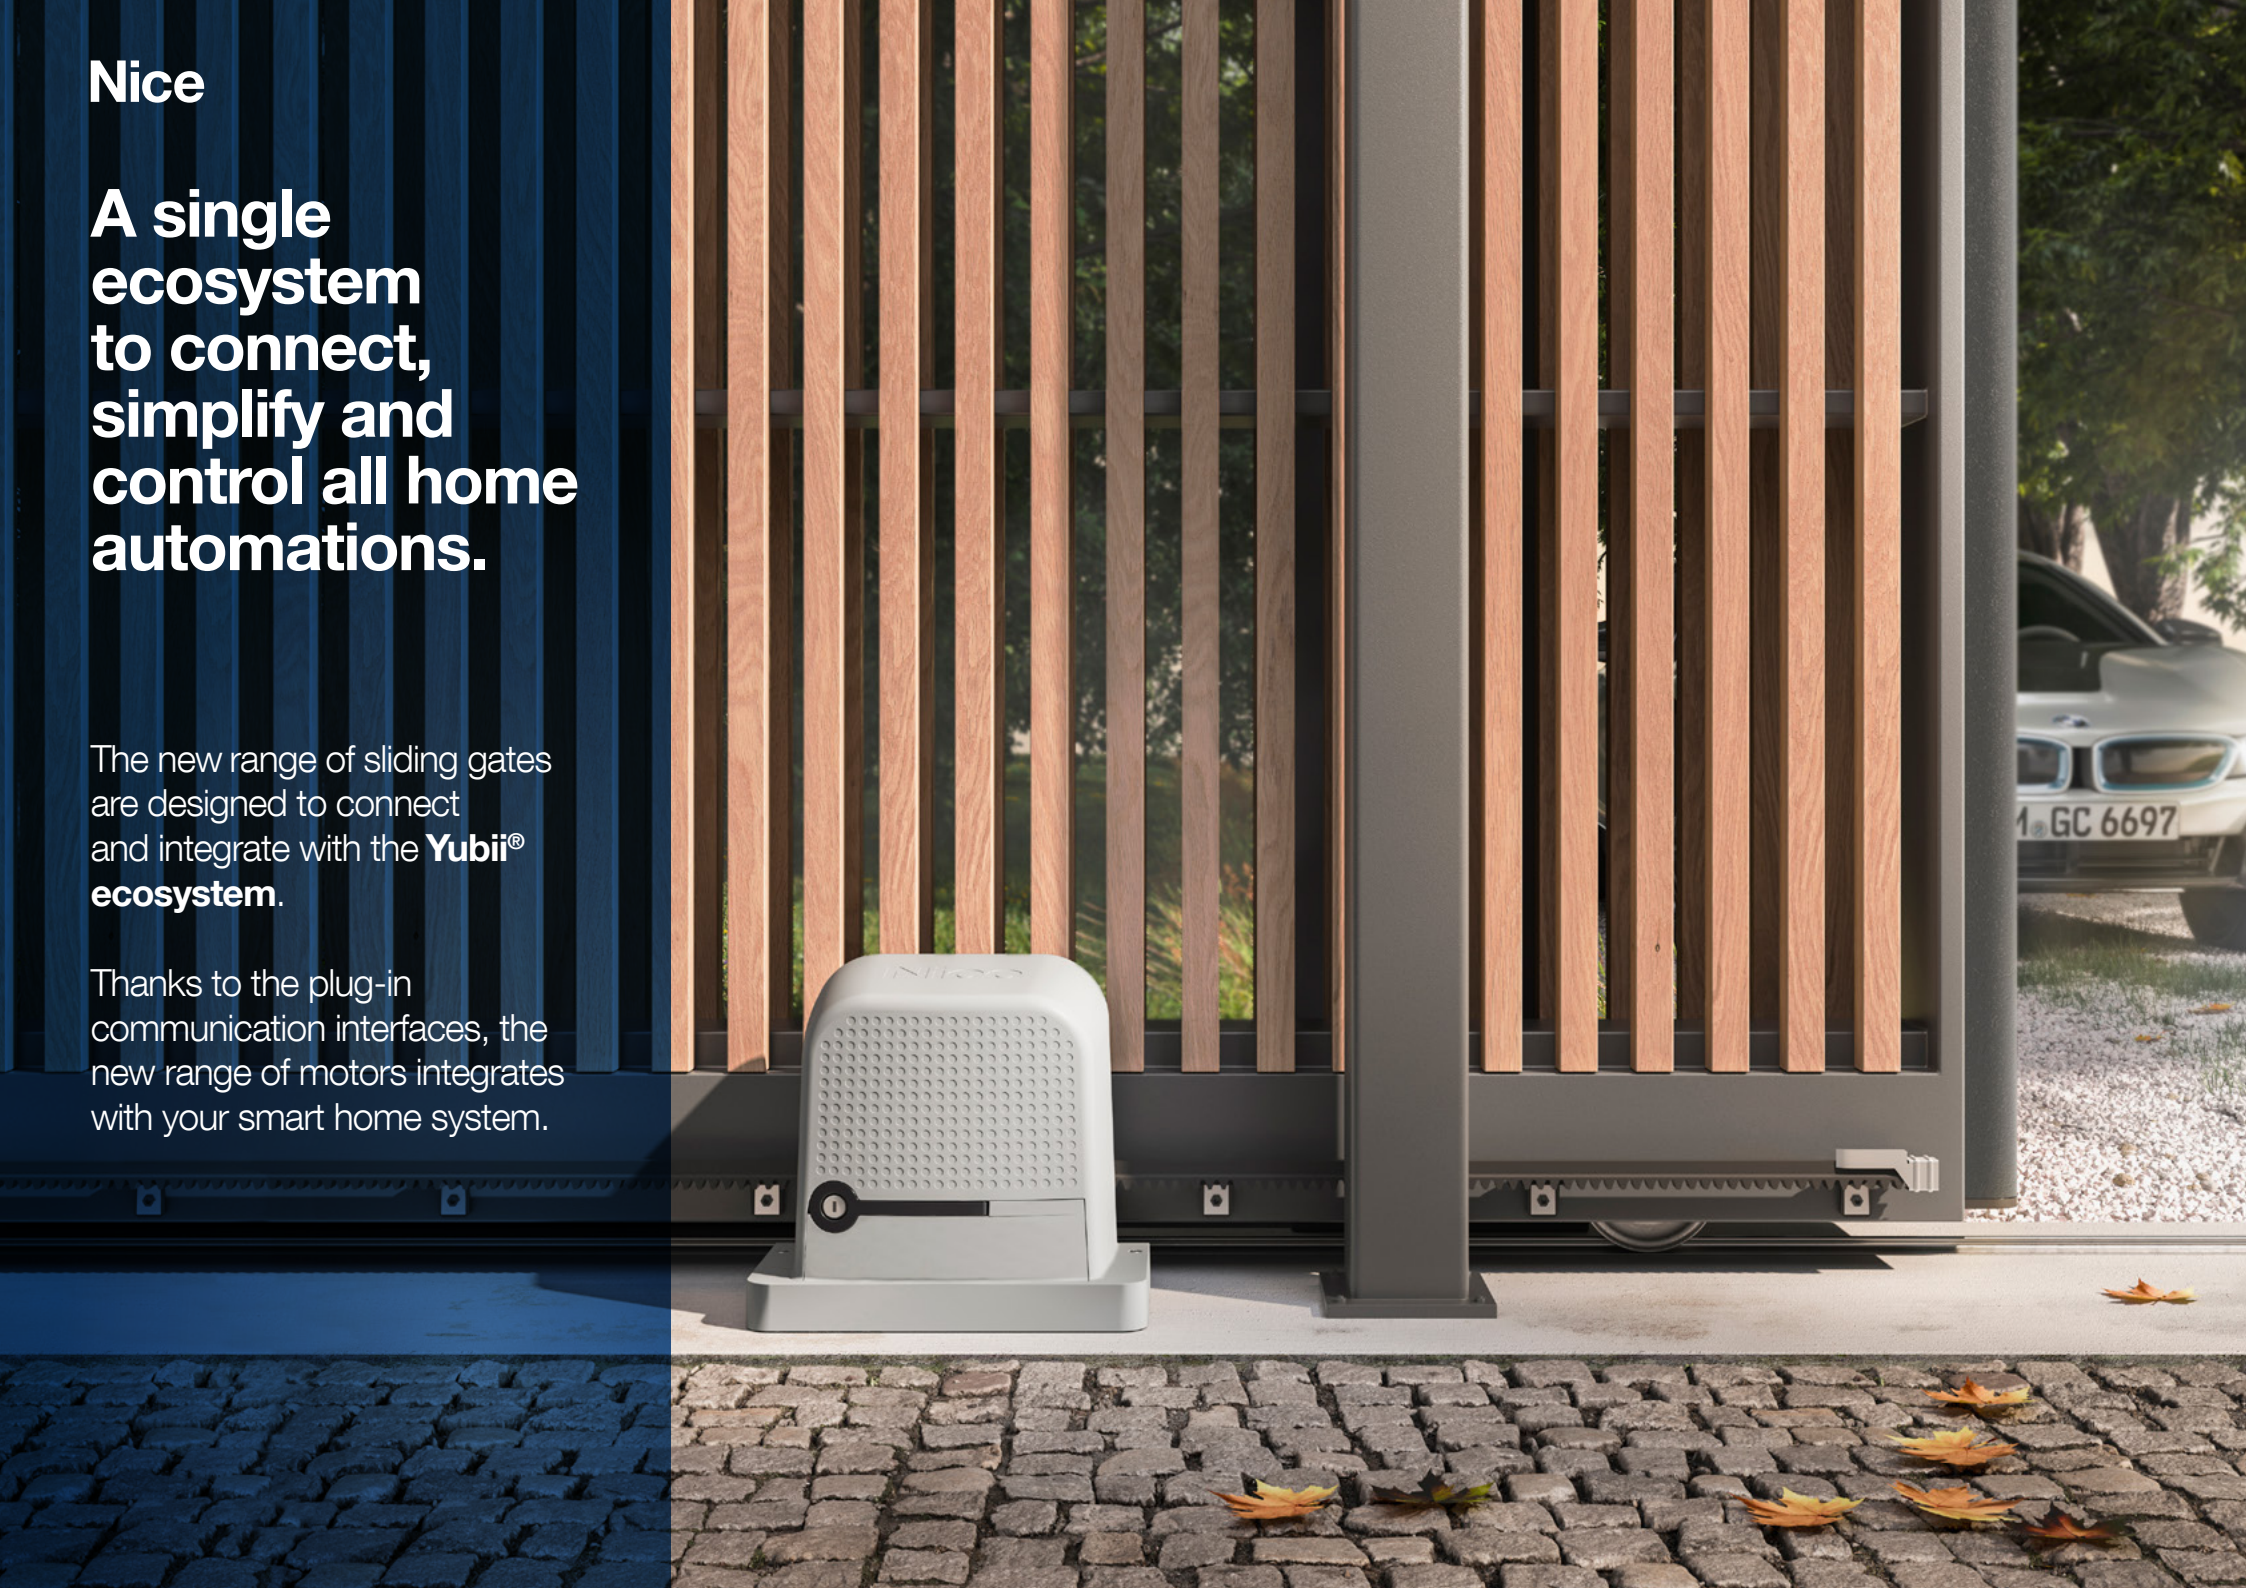



# Nice connectivity tools

## Smart Home Hub



### YUBIIHOME


Gateway for remote control of Nice automations with radio receiver and all smart, Z-Wave™ and WiFi devices.

DESIGNED FOR THE END CONSUMER



Yubii App

You can use your smartphone and the Yubii app to manage all your Smart Home automations and Z-Wave devices wherever you are.



### CORE

Wi-Fi gateway for remote control of Nice automations with radio receiver.

DESIGNED FOR THE END CONSUMER



MyNice Welcome App

You can use your smartphone and the MyNice Welcome app to manage your home's Nice automations wherever you are.



## Communication and programming interfaces



### IBT4N

Interface for connecting the Pro-View programming unit and IT4WIFI smart interface.



### BIDI-WIFI

Plug-in programming interface to configure the automation via smartphone.



### BIDI-ZWAVE

Plug-in communication interface for communicating between Z-Wave™ gateway and Nice motors.




### IT4WIFI

Smart Wi-Fi interface to manage gates and garage doors remotely via smartphone.



### VOICE COMMANDS

Control your home automation the simplest way possible, including from your smart watch or smart car via Amazon Alexa, Google Assistant or Siri.

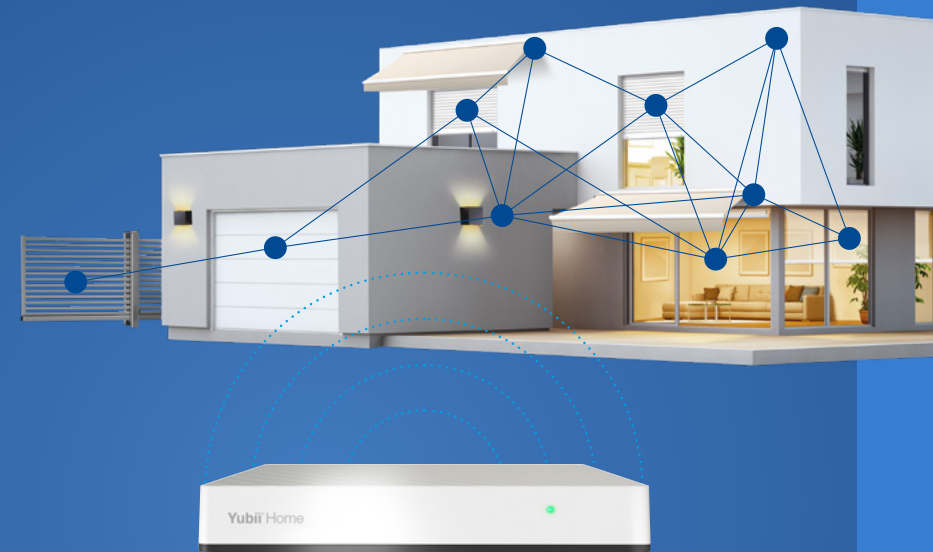

# We make even the smallest of gestures extraordinary.

## Nice, a world without barriers.

Automation and control systems for gates, garage doors, blinds, awnings and rolling shutters and alarm systems for all types of space, from private homes to large public buildings.

[www.niceforyou.com](http://www.niceforyou.com)

Nice SpA  
Oderzo, TV, Italy



Nice takes care of the environment. By using natural paper, we avoid excessive use of raw materials and exploitation of the forests. Waste is reduced, energy is saved and climate quality is improved.